

WV-1500DH
WVD-1502DH
WV-2002DH


Polyform Wet & Dry Range

The Polyform machines have established a standard and reputation in industrial use that has genuinely stood the test of time with production now in its 18th year.

Many improvements have taken place during that time but not in the original hard working, heavy-duty, thoroughly reliable concept.

With these machines you have a choice of performance Simplex one motored or Duplex two motored, Structofoam power heads, a choice of capacity 50-litre and 70-litre and all models are equipped with a stainless steel chassis and large transit wheels as standard.

All models are suitable for wet and dry use and the standard accessory kit includes large Structofoam nozzles for both applications.

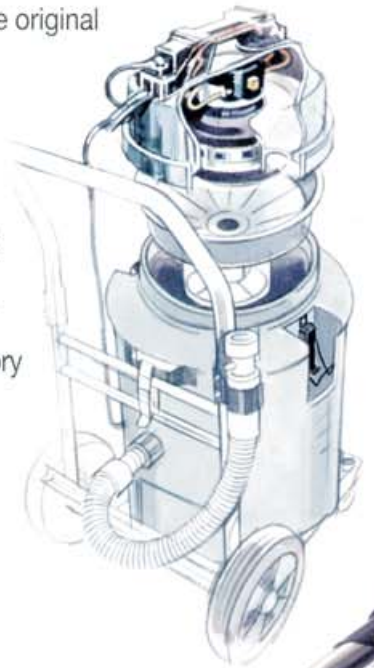


WV-1500 DH

Kit BB-8

WVD-2002 DH

Kit BB-8

Kit BB-8

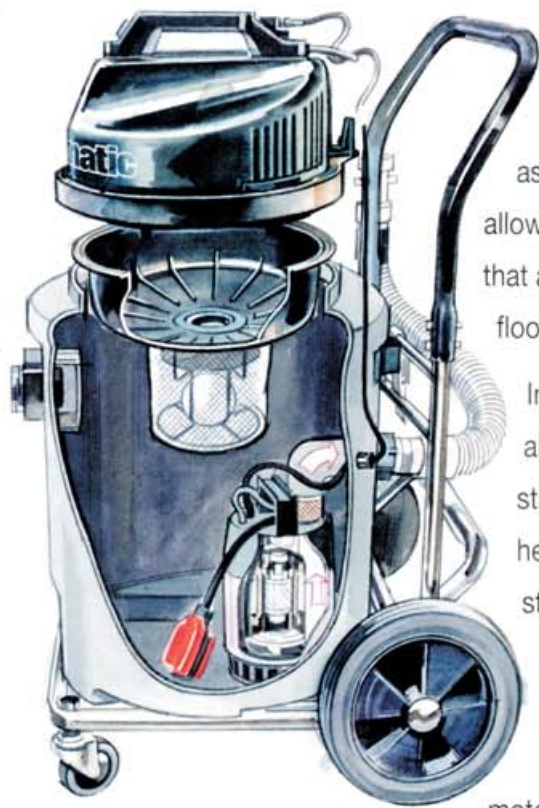

POLYFORM AUTOMATIC "PUMP OUTS"

The 1500 and 2002 Polyform series is also available as 'AP' models with a fully integrated submersible pump, allowing for continuous suction and pump-out operations that are required in such applications as salvage work, flood damage, flat roofing, fire services and the like.

In general construction the 'AP' series incorporates all the many advantages of the standard 1500/2002 series:

- heavy duty austenitic stainless steel chassis,

- Structurofoam power head, available in

- Simplex (one-motored) or Duplex

(two-motored) specification and the extra heavy duty Polyform container.

Adding to the many standard features you have the fully integrated high performance submersible pump unit with its own level control switch and non-return valve, permitting fully automatic continuous discharge of effluent through the standard 10m hose.









WVD-2002 AP

Kit BB-7



Kit BB-7

									
	Motor	Power	Airflow	Suction	Capacity (Litres)	Pump Motor	Cleaning Range	Weight	Size
WV-1500 DH	1000W	230/120V AC 50/60Hz	40 litres/sec	2200mm	75 dry/50 wet	-	26.8m	20 Kgs	620 x 564 x 970mm
WVD-1502 DH	2000W	230/120V AC 50/60Hz	80 litres/sec	2200mm	75 dry/50 wet	-	26.8m	22.5 Kgs	620 x 564 x 970mm
WVD-2002 DH	2000W	230/120V AC 50/60Hz	80 litres/sec	2200mm	95 dry/70 wet	-	26.8m	31 Kgs	620 x 564 x 975mm
WV-1500 AP	1000W	230/120V AC 50/60Hz	40 litres/sec	2200mm	50 wet	AP = 500W	26.8m	28.5 Kgs	620 x 564 x 970mm
WVD-1502 AP	2000W	230/120V AC 50/60Hz	80 litres/sec	2200mm	50 wet	AP = 500W	26.8m	30.5 Kgs	620 x 564 x 970mm
WVD-2002 AP	2000W	230/120V AC 50/60Hz	80 litres/sec	2200mm	70 wet	AP = 500W	26.8m	32 Kgs	620 x 564 x 975mm