


## Type H Industrial Cleaners

### KAV 15-45 Type H

## Compressed Air Powered Vacuum Cleaners for Hazardous Dusts

This range of industrial vacuum cleaners is suitable for picking up hazardous dust and debris in gas zone 1 & dust zone 21. All models are supplied on a stainless steel caddy with braked castors and conductive wheels where applicable and all models are fully earth bonded and have an anti-static (conductive) vacuum and air supply hose. Every vacuum cleaner is individually tested and provided with its own test certificate for earth path continuity. All units are supplied with a complete conductive accessory kit.

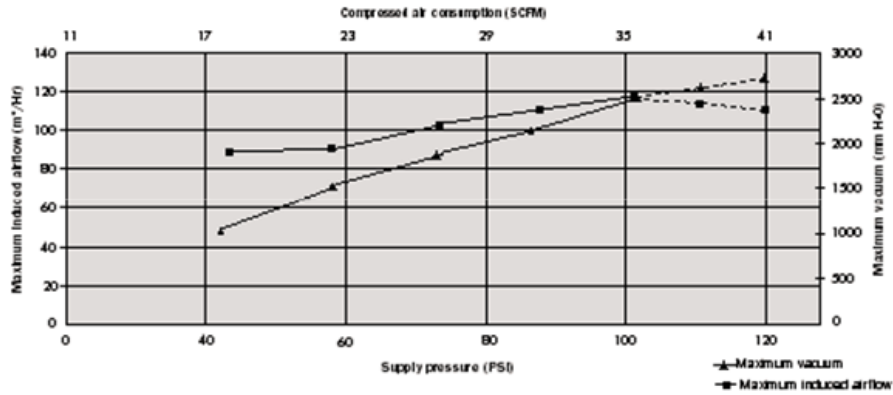

Please note power requirement – Do you have sufficient compressed air to spare?

## TECHNICAL SPECIFICATIONS

### Filtration:

- 1st Stage Disposable Paper Bag
- 2nd Stage Anti-Static (Conductive) Cloth Filter
- 3rd Stage High Efficiency Particulate Air (HEPA) Filter.

Efficiency 99.997% at 0.6 micron to BS 3928

### Mobility:

- KAV15 & KAV20 - 4x75mm Conductive Heavy Duty Castors
- KAV 18, 30 & 45 - 2x75mm Conductive Heavy Duty Castors & 2x200mm Conductive Wheels on a Heavy Duty Tubular Steel Stainless Caddy.
- Canister detachable from Caddy

Dimensions (H x W x D) mm



Type H KAV 15, KAV 18, KAV 20



Type H KAV 30, KAV 45

KAV 15H - 525 x 380 x 380 KAV 18H - 895 x 410 x 420  
KAV 20H - 725 x 440 x 440 KAV 30H - 895 x 460 x 500  
KAV 45H - 895 x 460 x 500

Cleaning range from air point:  
16 Metres/52 Feet

**Weight (kg):**

KAV 15H - 10.2, KAV 18H - 14.5, KAV 20H - 15.5  
KAV 30H - 20.8, KAV 45H - 21.7

All models are supplied with a certificate of filtration efficiency, a certificate of earth path continuity, 10 disposable paper bags, 10 self-adhesive sealing disc for paper bag, a spare Anti-Static (conductive) cloth filter assembly, a 5 metre conductive air supply hose, a 38mm conductive hose and toolkit

*All Kerstar Airvac ATEX approved as category 2 **CE Ex II 2 G D c II C 50oC (T6)***



D1 AS - 38mm Wet and Dry Anti-Static Vacuum Tool Kit