


Type H Industrial Cleaners

KAV 15-45 Type H

Compressed Air Powered Vacuum Cleaners for Hazardous Dusts

This range of industrial vacuum cleaners is suitable for picking up hazardous dust and debris in gas zone 1 & dust zone 21. All models are supplied on a stainless steel caddy with braked castors and conductive wheels and all models are fully earth bonded and have an anti-static (conductive) vacuum and air supply hose. Every vacuum cleaner is individually tested and provided with its own test certificate for earth path continuity. All units are supplied with a complete conductive accessory kit.

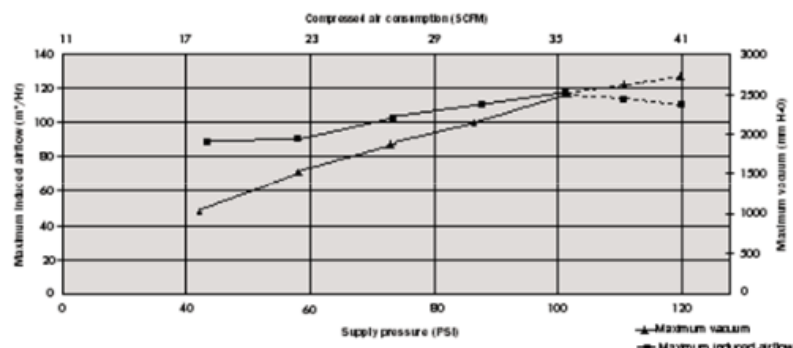

Please note power requirement – Do you have sufficient compressed air to spare?

TECHNICAL SPECIFICATIONS

Filtration:

- 1st Stage Disposable Microfibre Bag
- 2nd Stage Anti-Static (Conductive) Cloth Filter
- 3rd Stage High Efficiency Particulate Air (HEPA) Filter.

Efficiency 99.995% at 0.6 micron

Mobility:

- KAV15 & KAV20 - 4x75mm Conductive Heavy Duty Castors
- KAV 18, 30 & 45 - 2x75mm Conductive Heavy Duty Castors & 2x200mm Conductive Wheels on a Heavy Duty Tubular Steel Stainless Caddy.
- Canister detachable from Caddy

Dimensions (H x W x D) mm

- KAV 15H - 560 x 380 x 380
- KAV 18H - 885 x 410 x 420
- KAV 20H - 730 x 440 x 440
- KAV 30H - 875 x 460 x 500
- KAV 45H - 975 x 460 x 500

Cleaning range from air point:

16 Metres/52 Feet

Weight (kg):

- KAV 15H - 10.2, KAV 18H - 14.5, KAV 20H - 15.5
- KAV 30H - 20.8, KAV 45H - 21.7

All models are supplied with a certificate of filtration efficiency, a certificate of earth path continuity, 5 disposable microfibre bags, a spare Anti-Static (conductive) cloth filter assembly, a 5 metre conductive air supply hose and a 38mm conductive hose and toolkit

All Kerstar Airvacs ATEX approved as category 2 CE II 2 G D c II C T50°C (T6)

[back to top](#)



Type H KAV 15, KAV 18, KAV 20



Type H Industrial Cleaners: KAV 15-45 Type H



Type H KAV 30, KAV 45



38mm D1 AS Dry Vac Anti Static Toolkit